



Compact double pulley for block-and-tackle systems. Main attachment point accommodates two carabiners and the becket features a bottom attachment point for linking components in a block-and-tackle system. For use with ropes up to 13 mm. Prusik minding, the self-locking knot can be installed on both sides of both wheels. Self-lubricated brass bushings are sufficient for light applications at low speed.

Efficiency: 80%. Aluminum alloy body and wheels, stainless steel axle.

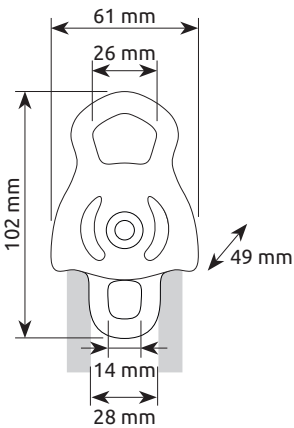

Ref.	Product name	Weight		Inner sheave diameter	Rope diameter	Working load max	Breaking load	CE	EAC
		g	oz	mm	Max - mm	kN	kN		
2156	DRYAD	170	6.0	28	13	1 kN x 4 = 4 kN	24	EN 12278	•